



RECESSED DOWNLIGHTS YOUR INTELLIGENT SELECTION IS **VITAL**

Downlight installation standards have changed. Property owners and/or trades involved are strongly advised to closely analyse and select an option that provides adequate protection against future fire risk.

The Firebreak™ range of downlights is seen as one of the simplest quality solutions to meet AS/NZS 3000:2007 (4.5.2.3) and AS/NZS 60598, and more.

Property owners normally require reliable, safe, quality downlights, minimised power bills, a clean, healthy, private indoors, with good flexibility as to downlight positioning. Therefore they should very carefully select a combination that delivers nothing less.

Installers should insist on comprehensive instructions with any downlight or enclosure. These should cover all aspects of the installation including adjacent insulation. **Details can make all the difference to the outcome.**


Many have realised, some regrettably too late, that the option selected did not meet their expectations, apart from the lighting itself. Many are living with hidden fire risk and 24/7 consequences that they have not yet attributed to poor quality recessed downlights.

Although most existing downlight flaws can be solved with Arrowform's range of approved retro-fit enclosures, why not -

“ get it right from day one ”

WHY SHOULD I CHOOSE FIREBREAK™ DOWNLIGHTS?

- ✓ Prevent hi-temp exposure in the ceiling AND proven risk of a devastating ceiling fire with cool robust inbuilt fire protection. Smoke alarms and insurance cover don't do this!
- ✓ Firebreak's™ “cool” fixed and tilt downlights comply to AS/NZS 3000:2007 (4.5.2.3). They do not require a costly heat forward lamp to produce mandatory, safe temperatures. (Common replacement globes <50W can be used).
- ✓ Firebreak™ downlights are trust-worthy. Each downlight is supplied with full installation instructions.
- ✓ Avoid up to 200mm “default” clearances to insulation/timber (which bring shocking 24/7 energy waste and acoustic breakdown, with NO guarantee of fire safety).
- ✓ For downlight positioning flexibility. Fit them where you want them eg. close to timber and insulation. Large quality flange also increases installation convenience.
- ✓ Fire rated for up to 90 minutes to BS476 parts 21 and 23.
- ✓ Strong sealed spring clips and a silicon gasket behind the flange give Firebreak™ downlights an added seal. Fixed models provide best draught, dust, allergen & insect control.
- ✓ Save time with quick, easy installation from below ceiling (flex and plug option with 12V models).
- ✓ Reliable kit complete with high quality electronic transformer and Osram 50W / 60° globe standard (option of 35W high output energy saver halogen / OR enquire about our 240V GU10 CFL dedicated EECO-LITE model).



ARROWFORM

Engineered Products for the future

www.arrowform.com.au

FREECALL 1800 852 741
for your closest stockist

or Email sales@arrowform.com.au
5 Richards Road, Swan Hill, VIC 3585



THE FIREBREAK™ SERIES




COOL FIRE PROTECTION DOWNLIGHTS

FIREBREAK™

FIXED : L/V



NEW: EECO-LITE GU10 Fixed (for CFL only)
Same look / sizes as Firebreak™ Fixed models.

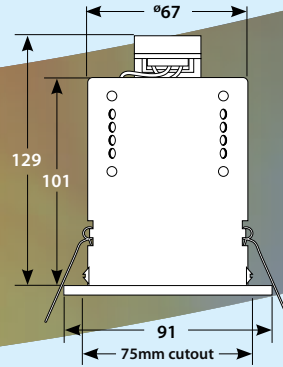


- FLFWDC50 - L/V FIXED WHITE 50W KIT
 - FLFWDC35 - L/V FIXED WHITE 35W ENERGY SAVER KIT
 - FLFSDCK50 - L/V FIXED SATIN CHROME 50W KIT
 - FLFSDCK35 - L/V FIXED SATIN CHROME 35W ENERGY SAVER KIT
- FOR WIRED-IN FLEX & PLUG ADD FP TO PART CODE E.G. FLFWDC50FP

Comply with AS/NZS 3000:2007 4.5.2.3 option (c)
or enquire about our zero clearance **EECO-LITE GU10 Fixed** (for CFL only)
• GFGFWDC - WHITE / • GFGFSDC - SATIN CHROME (lamp not incl.)

FIREBREAK™

TILT : L/V

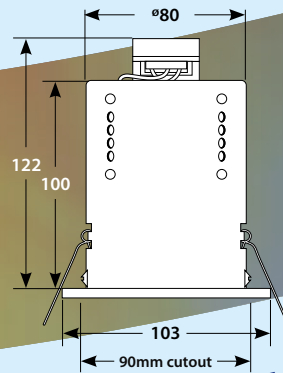


- FLGWDCK50 - L/V TILT WHITE 50W KIT
 - FLGWDCK35 - L/V TILT WHITE 35W ENERGY SAVER KIT
 - FLGSDCK50 - L/V TILT SATIN CHROME 50W KIT
 - FLGSDCK35 - L/V TILT SATIN CHROME 35W ENERGY SAVER KIT
- FOR WIRED-IN FLEX & PLUG ADD FP TO PART CODE E.G. FLGWDCK50FP

New installations OR replace existing... easy

FIREBREAK™

SHOWERLIGHT : L/V

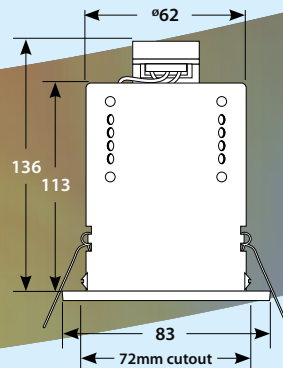

- FLF14 - 1K50 - L/V SHOWERLIGHT IP65 WHITE 50W KIT
 - FLF14 - 1K35 - L/V SHOWERLIGHT IP65 WHITE 35W ENERGY SAVER KIT
 - FLF15 - 1K50 - L/V SHOWERLIGHT IP65 SATIN CHROME 50W KIT
 - FLF15 - 1K35 - L/V SHOWERLIGHT IP65 SATIN CHROME 35W ENERGY SAVER KIT
- FOR WIRED-IN FLEX & PLUG ADD FP TO PART CODE E.G. FLF14-1K50FP

Firebreak™ downlights are COOL